

GRIFAID[®]

Family Filter

For FAMILIES & SMALL GROUPS TECHNICAL DATA

Flow Rate:

2 litres per minute*

Ultrafiltration Filter Capacity:

200,000 litres*

Operating Life:

>5 years*

Bacteria Retention:

>99,9999% (log 6)

Virus Retention:

>99,9999% (log 6)

MWCO:

100,000 Daltons (equivalent to 0.01 Microns)

US Compliance:

EPA-US National Primary Drinking Water Regulations under the Safe Water Drinking Act 93-523

Dry Weight:

1.2kg

Dimensions of Packaged System:

Height: 360mm

Width: 80mm

Depth: 150mm


Units per Pallet:

Standard Pallet 270

Euro Pallet 180

To Operate:

1. Collect water in a bucket or any other available vessel
2. Place the Grifaid[®] Family Filter in the water
3. Pump for safe drinking water

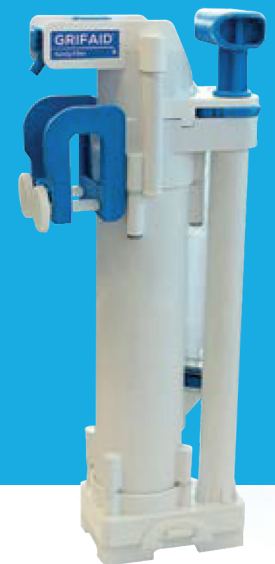

Design Features:

- Detachable pre-filter gauze
- 120 microns mesh screen
- Automatic cross flow cleaning
- Built-in back flushing
- Built-in purging

Maintenance:

- Stored-in grease reservoir
- Stored-in spare seals

Pressure Control:

- 3.5 Bar security valve

Warranty:

1 year international limited

FOR MORE INFORMATION about our Grifaid[®] Water Filters or to donate, log onto www.grifaid.org or contact us on the details below



The Safewater Trust Ltd
Unit 8, Tower Road, Glover Industrial Estate,
Washington, Tyne and Wear, NE37 2SH, UK



info@safewatertrust.com



+44 (0) 191 340 0583

UK Registered Company: 6908577

* Depends on maintenance and feed water quality

Tech/Data/GFF5/2020/01/EN